



STRAIGHT DROP AWNINGS



SIMPLE PRACTICALITY


This is a traditional style awning that has been given a clean modern look. Simple to operate and ideal for spaces where guide channels are not suitable, the awning can easily be strapped down to a railing or directly to the floor.



TECHNICAL INFORMATION

Size Limitations

Control Type	Min Width	Min Drop	Max Width	Max Drop	Max Area
Manual Crank	1000	500	5000	4000	16 sqm
Wynmotion Motorisation	1000	500	5000	4000	16 sqm

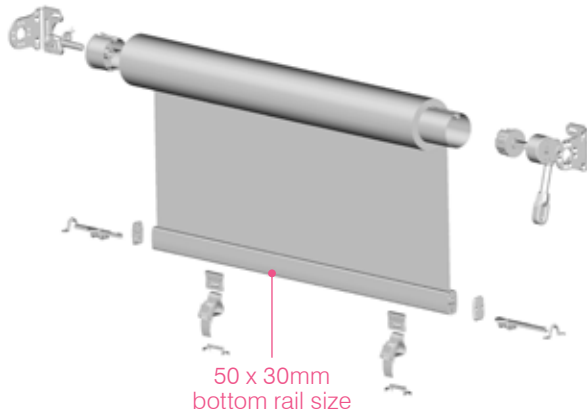

Operating Options

Straight Drop Awnings can be operated by:


1. Manual Crank
2. Wynmotion Motorisation

Head Box Options

Choose from 3 head box styles:

1. Closed head box
2. Open head box
3. No head box

BENEFITS

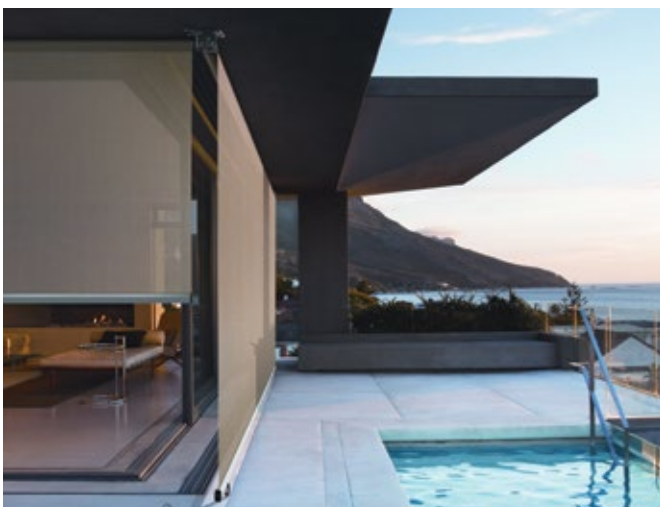

Hardware Colours

With 6 standard colours inspired by popular COLORBOND® colours, so your awning can complement most exteriors styles. Custom colours available.



Black
Inspired by: Night Sky®



Woodland Grey




Silver Pearl



Paper Bark



Primrose
Inspired by: Classic Cream®



Pearl White

Bottom Rail Accessories

Locking Bolt - Secures the awning into the side channel base, cable bracket or breaching staple. As the bolt is inserted inside the base rail, the system maintains its clean aesthetic, and allows the bottom rail to be positioned closer to the ground.

Hold Down Strap - Hold down straps can be used to hold the awning down at various points across the width of the awning. Similar to the locking bolts, the hold down clips insert inside the bottom rail for a clean finish.

Multiple Fabrics Suitable

The Straight Drop Awning can be made with sunscreen, acrylic, or canvas fabric which is highly effective in blocking UV rays.

Child-Safe

No cords or cables adds an extra level of child-safety.

Satisfaction Guaranteed

Quality installation is assured with our specialist team, and peace of mind with a Wynstan 3 year warranty.*

*For more information about our Wynstan 3 year warranty, please see our Warranty & Care Guide manual.

Book your FREE in-home consultation today! 1300-667-679